


Warmup Self Regulating Cable

Overview

The Warmup Self Regulating Cable protects against dangerous build-up of snow and ice on roofs, within gutters and downpipes and prevents pipes from freezing. The oval 10.5mm by 6mm self-regulating cable is insulated with a UV stable thermoplastic elastomer, ensuring its durable and simple to fit.

During the winter months, when the temperature drops and snow fall increases, roofs, gutters and downpipes are at risk of damage from ice and snow. Ice dams can form along the edge of pitched roofs, causing pooling of snow melt and a destructive freeze-thaw cycle that can lift tiles, leading to leaks. Untreated, the snow melt can refreeze in gutters and downpipes potentially overloading them or causing dangerous icicles to form as snow melt trickles over the edge.

The Warmup Self-Regulating Cable de-ices roofs and gutters, controlling snow build up and eliminating the damaging freeze-thaw cycle by creating a clear drainage path for the snow melt to flow away. The cables adaptive heat output provides an energy efficient solution, increasing its heat output when needed the most and reducing its heat output as the roof clears and its temperature increases.

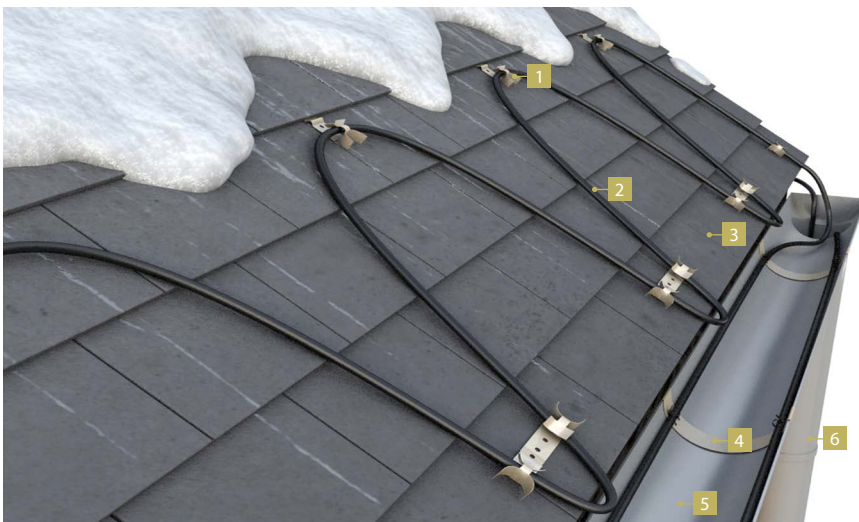

ROOF CONSTRUCTION

- 1 Warmup Roof Fixing Clip
- 2 Warmup Self Regulating Cable
- 3 Roof
- 4 Warmup Gutter Bar
- 5 Gutter
- 6 Drainpipe



Outdoor
Heating

0345 345 2288

uk@warmup.com
www.warmup.co.uk

Warmup[®]

The world's best-selling floor heating brand™

Features

- Self Regulating Cable can be cut to length without affecting its performance making it easy to install the exact cable length
- Can also be used to provide trace heating for pipes to prevent them freezing or boilers from shutting down
- The thermoplastic elastomer coating on the cable is UV Resistant preventing premature aging due to exposure
- FIMKO Approved and CE marked meeting the highest safety standards for ultimate peace of mind **CE** **FI**
- 10 Year Warranty

Technical Specifications

TECHNICAL DATA - Self Regulating Cable

OPERATING VOLTAGE	220 - 240v: 50Hz
IP RATING	IPX7
COLOUR	BLACK
OUTER DIAMETER	10.5mm x 6mm
OUTPUT RATING (Wet at 10°C)	20W/m
INNER & OUTER SHEATH	THERMOPLASTIC ELASTOMER
BUS BARS	COATED COPPER 1.22sqmm
CABLE LENGTH	Cut to length self-regulating cable. Sold per meter; Minimum order quantity: 20 meters.

Additional Components

Self Regulating termination kit
- SR-TK



Roof Clips - WRC



Gutter bar & cable ties
- WGB



Downspout Hanger 10/20m
- WDSH

